


Bohler Flat Creasing Rule

Description

Single Round Crease has a perfectly radiused profile with very tight tolerances and a flat back. Can be used either way for a crisp fold.

Double Round Crease has a perfectly radiused profile with very tight tolerances and a flat back.

Specialty Profile Crease are excellent for solving difficult diecutting applications.

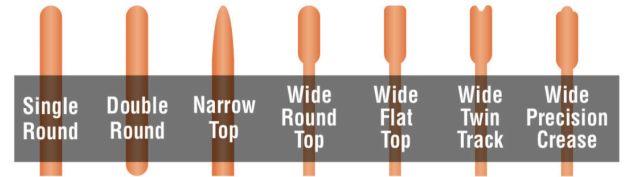

Physical Properties

Hardness	HT: ~380HV (39 HRC) / HR: min 265 HV
Point Thickness	1.5-6
Height	20.30-24.40mm

Availability & Ordering Information

Bohler Flat Creasing Rule is available in the following profiles:

- Single Round (SR)
- Double Round (DR)
- Narrow Top (NT)
- Wide Round Top (WRT)
- Wide Flat Top (WFT)
- Wide Twin Track (WTT)
- Wide Precision Crease (WPC)

Steel rule in 30", 36", and meter lengths can be purchased by the piece. Clockwise, anti-clockwise, and dispenser coils are sold in full coils only.

The user shall determine the suitability of this product for their application and assumes all risks and liabilities associated with the use of this product. The exclusive remedy for all proven claims is replacement of our materials only and in no events shall Freeman Mfg. & Supply Co. be liable for special, incidental, or consequential claims.

READ SAFETY DATA SHEETS AND PRODUCT LABELS BEFORE USING PRODUCT