

## Bohler Universal 75 Precision Cutting Rule


### Description

Bohler® Universal 75 cutting rules offer excellent stability and wear resistance, required when die-cutting heavy materials such as gaskets, thick substrates, various plastics, and abrasive materials.



### Physical Properties

Body Hardness	~525 HV (51 HRC)
Edge Hardness	~700 HV (60 HRC)
Bendability	$\alpha=90^\circ$ , R ~1.7mm
Point Thickness	2, 3, 4
Height	22.00-100.00mm
Bevel Finish	S, G, P

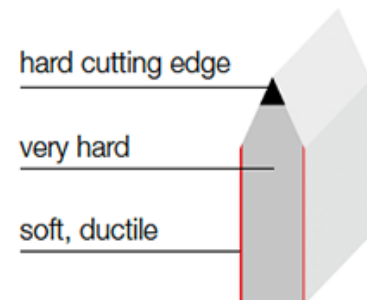

### Availability & Ordering Information

Steel rule is available in four bevel profiles:

- CF (Center Face, Single Bevel)
- SF (Side Face, Single Bevel)
- CFDB (Center Face, Double Bevel)
- SFDB (Side Face, Double Bevel)

Bohler Universal 75 is available in three bevel finishes:

- Shaved
- Polished
- Ground

Steel rule in 30", 36", and meter lengths can be purchased by the piece. Clockwise, anti-clockwise, and dispenser coils are sold in full coils only.

The user shall determine the suitability of this product for their application and assumes all risks and liabilities associated with the use of this product. The exclusive remedy for all proven claims is replacement of our materials only and in no events shall Freeman Mfg. & Supply Co. be liable for special, incidental, or consequential claims.

READ SAFETY DATA SHEETS AND PRODUCT LABELS BEFORE USING PRODUCT